
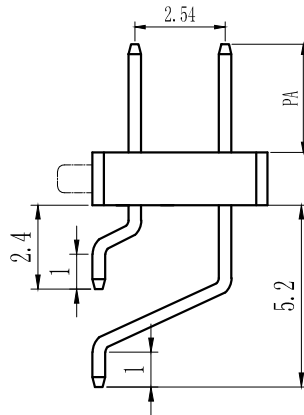
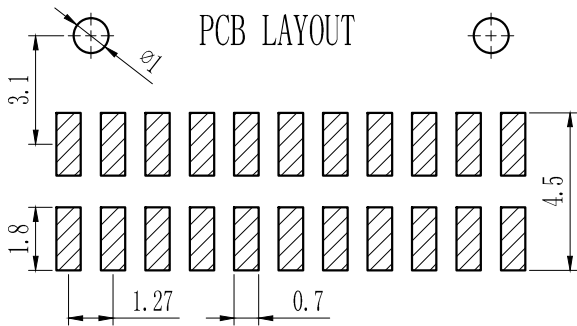
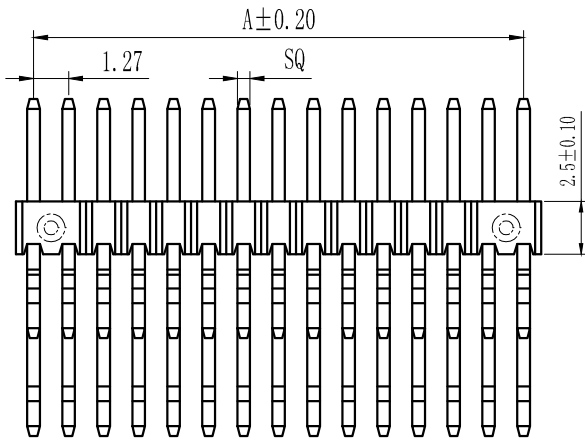


| Pin数 | 尺寸A   | 尺寸B   |
|------|-------|-------|
| 1    |       | 1.27  |
| 2    | 1.27  | 2.54  |
| 3    | 2.54  | 3.81  |
| 4    | 3.81  | 5.08  |
| 5    | 5.08  | 6.35  |
| 6    | 6.35  | 7.62  |
| 7    | 7.62  | 8.89  |
| 8    | 8.89  | 10.16 |
| 9    | 10.16 | 11.43 |
| 10   | 11.43 | 12.70 |
| 11   | 12.70 | 13.97 |
| 12   | 13.97 | 15.24 |
| 13   | 15.24 | 16.51 |
| 14   | 16.51 | 17.78 |
| 15   | 17.78 | 19.05 |
| 16   | 19.05 | 20.32 |
| 17   | 20.32 | 21.59 |
| 18   | 21.59 | 22.86 |
| 19   | 22.86 | 24.13 |
| 20   | 24.13 | 25.40 |
| 21   | 25.40 | 26.67 |
| 22   | 26.67 | 27.94 |
| 23   | 27.94 | 29.21 |
| 24   | 29.21 | 30.48 |
| 25   | 30.48 | 31.75 |
| 26   | 31.75 | 33.02 |
| 27   | 33.02 | 34.29 |
| 28   | 34.29 | 35.56 |
| 29   | 35.56 | 36.83 |
| 30   | 36.83 | 38.10 |
| 31   | 38.10 | 39.37 |
| 32   | 39.37 | 40.64 |
| 33   | 40.64 | 41.91 |
| 34   | 41.91 | 43.18 |
| 35   | 43.18 | 44.45 |
| 36   | 44.45 | 45.72 |
| 37   | 45.72 | 46.99 |
| 38   | 46.99 | 48.26 |
| 39   | 48.26 | 49.53 |
| 40   | 49.53 | 50.80 |
| 41   | 50.80 | 52.07 |
| 42   | 52.07 | 53.34 |
| 43   | 53.34 | 54.61 |
| 44   | 54.61 | 55.88 |
| 45   | 55.88 | 57.15 |
| 46   | 57.15 | 58.42 |
| 47   | 58.42 | 59.69 |
| 48   | 59.69 | 60.96 |
| 49   | 60.96 | 62.23 |
| 50   | 62.23 | 63.50 |

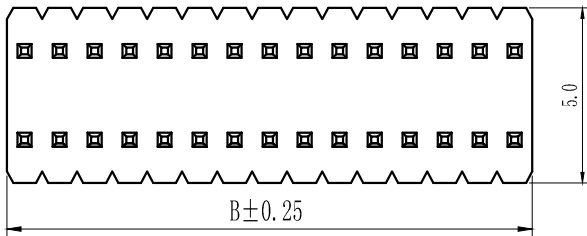

| SQ   |
|------|
| 0.40 |
| 0.46 |

技术规范:  
额定电流 : 1.0AMP  
适用温度 : -40℃to+105℃  
接触电阻 : 20mΩ Max  
绝缘电阻 : 1000MΩ Min  
耐电压 : AC 500V  
绝缘材料 : Polyester (UL94V-0)  
Standard:PA-6T  
端子材质 : Brass  
电镀规范 : Au or Sn Over 50u" Ni

| P a-10-1-2-5p-a-a-s-0 |          |         |      |      |           |        |        |         |               |
|-----------------------|----------|---------|------|------|-----------|--------|--------|---------|---------------|
| 排针系列                  | 间距       | 塑高      | 双塑   | 单排   | PIN位      | 电镀     | 材质     | 角度      | 备注            |
|                       | a=0.8mm  | 1.0-10  | 1-单塑 | 1-单排 | 1~40P/50P | A-1u"  | A-PBT  | S=180°  | 0-3.0         |
|                       | b=1.0mm  | 1.5-15  | 2-双塑 | 2-双排 | 2~40/50P  | B-3u"  | B-PA46 | R=90°   | 1-3.0/6.0(双塑) |
|                       | c=1.27mm | 1.6-16  | 3-三塑 | 3-三排 | 3~40/50P  | C-5u"  | C-PA6T | M=SMT   | 2-3.0/3.0(双塑) |
|                       | d=2.0mm  | 1.7-17  |      | 4-四排 | 4~40/50P  | D-10u" | D-PA9T | Z-Z型    | 3-2.8/4.0(双塑) |
|                       | e=2.5mm  | 2.0-20  |      |      |           | E-15u" | E-LCP  | Y=135°  | 4-2.6/3.5(双塑) |
|                       | f=2.54mm | 2.54-25 |      |      |           | F-30u" |        | L=卧式SMT | 其它另做说明        |
|                       | g=3.96mm |         |      |      |           | S-镀锡   |        |         |               |
|                       | h=5.08mm |         |      |      |           | H-半金锡  |        |         |               |

|            |  |              |  |                        |  |                                                                                          |  |                                                                                                   |
|------------|--|--------------|--|------------------------|--|------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------|
| TOLERANCE: |  | 上海狮拓电子科技有限公司 |  |                        |  |                                                                                          |  |                                                                                                   |
| X. ±XXX    |  |              |  |                        |  |                                                                                          |  |                                                                                                   |
| .X ±0.20   |  |              |  |                        |  |                                                                                          |  |                                                                                                   |
| .XX ±0.10  |  |              |  |                        |  |                                                                                          |  |                                                                                                   |
| ANG.       |  |              |  |                        |  |                                                                                          |  |                                                                                                   |
| 產品名稱:      |  |              |  | THIRD ANGLE PROJECTION |  | 客户确认                                                                                     |  | 1.27mm双排插针, 90°, SMT<br>Spec:1.27mm Pin Header, Dual Row, Right Angle, SMT<br>Positions: 2×2×2×50 |
| 產品料號:      |  |              |  |                        |  | <input type="checkbox"/> 承認 _____ 日期 _____<br><input type="checkbox"/> 驳回 _____ 日期 _____ |  |                                                                                                   |