
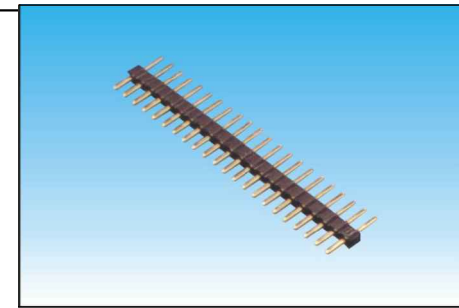
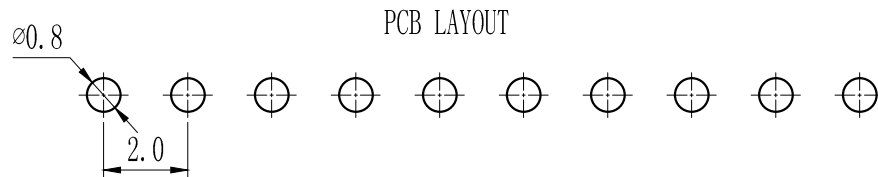
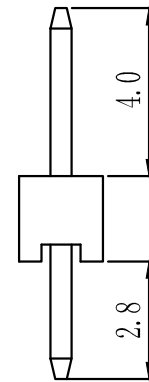
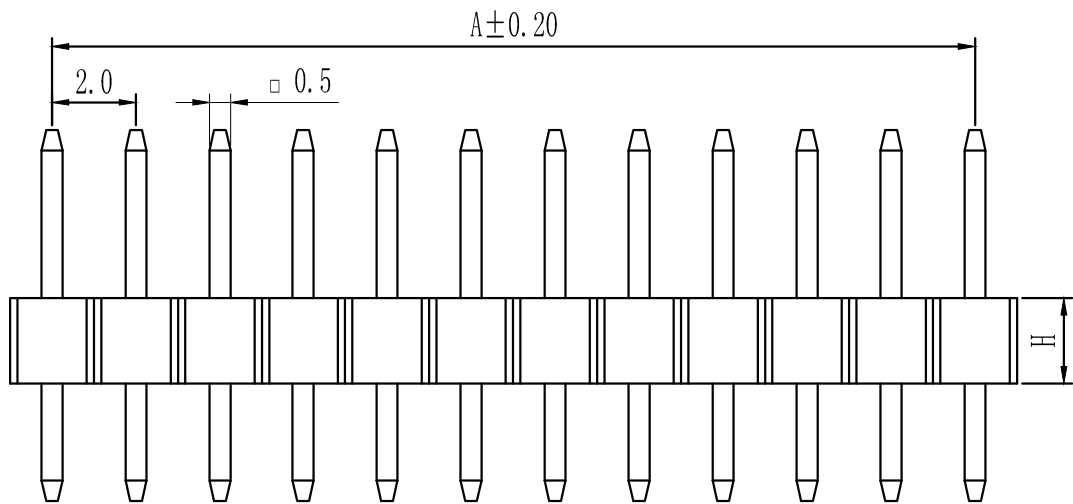


| Pin数 | 尺寸A   | 尺寸B   |
|------|-------|-------|
| 1    |       | 2.0   |
| 2    | 2.0   | 4.0   |
| 3    | 4.0   | 6.0   |
| 4    | 6.0   | 8.0   |
| 5    | 8.0   | 10.0  |
| 6    | 10.0  | 12.0  |
| 7    | 12.0  | 14.0  |
| 8    | 14.0  | 16.0  |
| 9    | 16.0  | 18.0  |
| 10   | 18.0  | 20.0  |
| 11   | 20.0  | 22.0  |
| 12   | 22.0  | 24.0  |
| 13   | 24.0  | 26.0  |
| 14   | 26.0  | 28.0  |
| 15   | 28.0  | 30.0  |
| 16   | 30.0  | 32.0  |
| 17   | 32.0  | 34.0  |
| 18   | 34.0  | 36.0  |
| 19   | 36.0  | 38.0  |
| 20   | 38.0  | 40.0  |
| 21   | 40.0  | 42.0  |
| 22   | 42.0  | 44.0  |
| 23   | 44.0  | 46.0  |
| 24   | 46.0  | 48.0  |
| 25   | 48.0  | 50.0  |
| 26   | 50.0  | 52.0  |
| 27   | 52.0  | 54.0  |
| 28   | 54.0  | 56.0  |
| 29   | 56.0  | 58.0  |
| 30   | 58.0  | 60.0  |
| 31   | 60.0  | 62.0  |
| 32   | 62.0  | 64.0  |
| 33   | 64.0  | 66.0  |
| 34   | 66.0  | 68.0  |
| 35   | 68.0  | 70.0  |
| 36   | 70.0  | 72.0  |
| 37   | 72.0  | 74.0  |
| 38   | 74.0  | 76.0  |
| 39   | 76.0  | 78.0  |
| 40   | 78.0  | 80.0  |
| 41   | 80.0  | 82.0  |
| 42   | 82.0  | 84.0  |
| 43   | 84.0  | 86.0  |
| 44   | 86.0  | 88.0  |
| 45   | 88.0  | 90.0  |
| 46   | 90.0  | 92.0  |
| 47   | 92.0  | 94.0  |
| 48   | 94.0  | 96.0  |
| 49   | 96.0  | 98.0  |
| 50   | 98.0  | 100.0 |
| 51   | 100.0 | 102.0 |
| 52   | 102.0 | 104.0 |

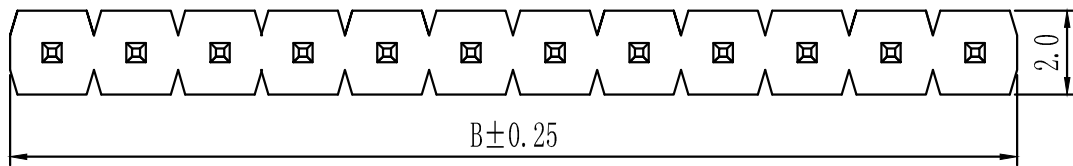

技术规范：  
 额定电流：1.5AMP  
 适用温度：-40℃to+105℃  
 接触电阻：20mΩ Max  
 绝缘电阻：1000MΩ Min  
 耐电压：AC 500V  
 绝缘材料：Polyester (UL94V-0)  
 Standard:PA-6T  
 端子材质：Brass  
 电镀规范：Au or Sn Over 50u" Ni

| 排针系列 | 间距       | 塑高     | 双塑   | 单排   | PIN位      | 电镀     | 材质     | 角度     | 备注            |
|------|----------|--------|------|------|-----------|--------|--------|--------|---------------|
|      | a=0.8mm  | 1.0-10 | 1-单塑 | 1-单排 | 1~40P/50P | A-1u"  | A-PBT  | S=180° | 0-3.0         |
|      | b=1.0mm  | 1.5-15 | 2-双塑 | 2-双排 | 2~40/50P  | B-3u"  | B-PA46 | R=90°  | 1-3.0/6.0(双塑) |
|      | c=1.27mm | 2.0-20 | 3-三塑 | 3-三排 | 3~40/50P  | C-5u"  | C-PA6T | M=SMT  | 2-3.0/3.0(双塑) |
|      | d=2.0mm  | 3.0-30 |      | 4-四排 | 4~40/50P  | D-10u" | D-PA9T | Z-Z型   | 3-2.8/4.0(双塑) |
|      | e=2.5mm  |        |      |      |           | E-15u" | E-LCP  | Y=135° | 4-2.6/3.5(双塑) |
|      | f=2.54mm |        |      |      |           | F-30u" |        |        |               |
|      | g=3.96mm |        |      |      |           | S-镀锡   |        |        | 其它另做说明        |
|      | h=5.08mm |        |      |      |           | II-半金锡 |        |        |               |

|            |                     |             |   |   |
|------------|---------------------|-------------|---|---|
| TOLERANCE: | <b>上海狮拓电子科技有限公司</b> | 姓名: _____   | 客户确认  | 2.0mm单排插针, 180°, 单塑<br>Spec:2.0mm Pin Header, Single Row, Straight<br>Positions: 1X1~1X52 |
| X. ±XXX    |                     | 日期: _____   |   |   |
| .X ±0.20   |                     | 审核: _____   | <input type="checkbox"/> 承认 _____ 日期: _____ |   |
| .XX ±0.10  |                     | 日期: _____   | <input type="checkbox"/> 驳回 _____ 日期: _____ |   |
| ANG.       |                     | 产品名稱: _____ | THIRD ANGLE PROJECTION                      |   |
|            | 产品料號: _____         |             |   |   |