


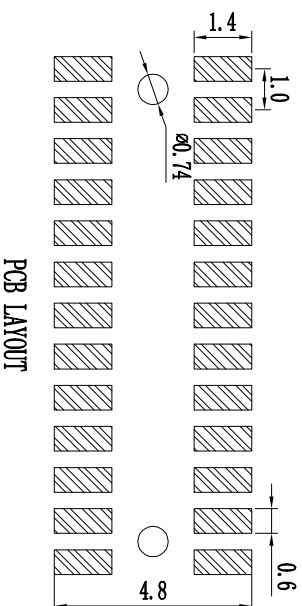
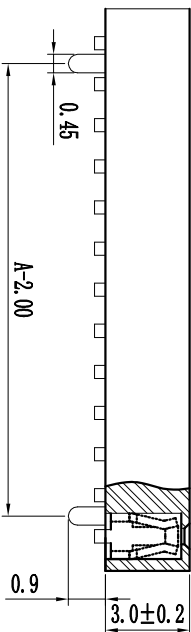


Pin#	尺寸A	尺寸B
2X2	1.00	2.40
2X3	2.00	3.40
2X4	3.00	4.40
2X5	4.00	5.40
2X6	5.00	6.40
2X7	6.00	7.40
2X8	7.00	8.40
2X9	8.00	9.40
2X10	9.00	10.40
2X11	10.00	11.40
2X12	11.00	12.40
2X13	12.00	13.40
2X14	13.00	14.40
2X15	14.00	15.40
2X16	15.00	16.40
2X17	16.00	17.40
2X18	17.00	18.40
2X19	18.00	19.40
2X20	19.00	20.40
2X21	20.00	21.40
2X22	21.00	22.40
2X23	22.00	23.40
2X24	23.00	24.40
2X25	24.00	25.40
2X26	25.00	26.40
2X27	26.00	27.40
2X28	27.00	28.40
2X29	28.00	29.40
2X30	29.00	30.40
2X31	30.00	31.40
2X32	31.00	32.40
2X33	32.00	33.40
2X34	33.00	34.40
2X35	34.00	35.40
2X36	35.00	36.40
2X37	36.00	37.40
2X38	37.00	38.40
2X39	38.00	39.40
2X40	39.00	40.40
2X41	40.00	41.40
2X42	41.00	42.40
2X43	42.00	43.40
2X44	43.00	44.40
2X45	44.00	45.40
2X46	45.00	46.40
2X47	46.00	47.40
2X48	47.00	48.40
2X49	48.00	49.40
2X50	49.00	50.40

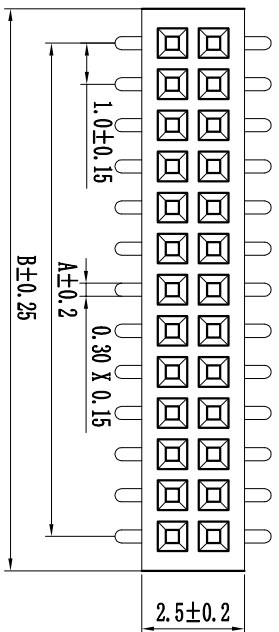

PC
3.2
3.8
4.1

技术规范:
 额定电流 : 0.75AMP
 适用温度 : -40°C to +105°C
 接触电阻 : 300mΩ Max
 绝缘电阻 : 1000MΩ Min
 耐电压 : AC 500V
 绝缘材料 : Polyester (UL94V-0)
 Standard: PA-6T
 端子材质 : Bronze
 电镀规范 : Au or Sn Over 50u" Ni

焊料类别	间距	厚度	焊盘	焊料	焊盘	角度	端子	备注
S-10	1.0mm	0.1mm	1-单排	1-70/30	B-10"	S-90°	12.5mm间距25	0-3.0
B-1	1.0mm	0.1mm	2-双排	2-40/60	B-50"	R-90°	11.2mm间距18	1-3.0/0.6 (双排)
C-1	1.27mm	0.1mm	3-三排	3-40/60	C-50"	C-70/50°	12.5mm间距22	2-3.0/0.3 (双排)
D-1	2.0mm	0.1mm	4-四排	4-40/60	D-100"	D-70/50°	左: 50° 右: 50°	2-2.8/0.4 (双排)
E-1	2.5mm	0.1mm			E-150"	E-70/50°	100°-非焊接端子	4-2.6/0.3 (双排)
F-1	3.0mm	0.1mm			F-200"	F-70/50°	100°-非焊接端子	其它另做说明
G-1	3.5mm	0.1mm			G-250"	G-70/50°	100°-非焊接端子	
H-1	4.0mm	0.1mm			H-300"	H-70/50°	100°-非焊接端子	

STG 上海狮拓电子科技有限公司

TOLERANCE:

X	±XXX
X	±0.20
XX	±0.10
ANG.	

產品名稱:
產品料號:

THIRD ANGLE PROJECTION

姓名 _____ 日期 _____
 日期 _____ 日期 _____
 日期 _____ 日期 _____

客戶確認

1.00mm 双排母, SMT, 塑高2.1mm 可带内柱
 Spec: 1.00mm Female Header, Dual Row, SMT with
 Locating Peg
 Positions: 2X2'2X50
 Plastics Height: 2.1mm