


PC
3.2
3.8
4.1

**技术规范:**  
 额定电流 : 0.75AMP  
 适用温度 : -40°C to +105°C  
 接触电阻 : 300mΩ Max  
 绝缘电阻 : 1000MΩ Min  
 耐电压 : AC 500V  
 绝缘材料 : Polyester (UL94V-0)  
 Standard: PA-6T  
 端子材质 : Bronze  
 电镀规范 : Au or Sn Over 50u" Ni

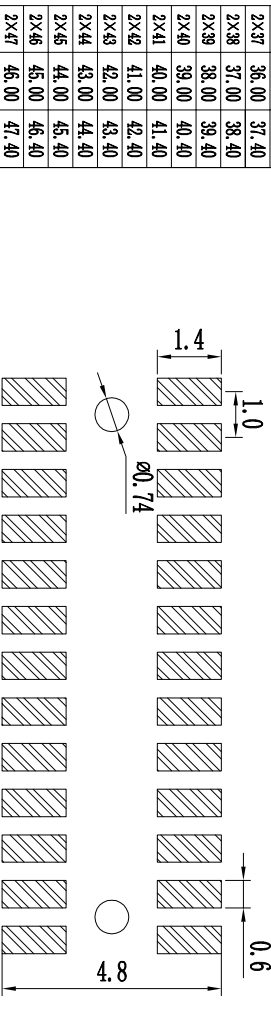

引脚系列	间距	长度	双排	单排	Pin数	电镀	材质	角度	端子	备注
a-10	2.50mm	3.2mm	1-单排	1-单排	10	1-10"	A-PA6T	S=90°	122.5mm间距25	0-3.0
a-10	2.50mm	3.8mm	2-双排	2-双排	20	2-20"	B-PA6T	R=90°	11.0mm间距18	1-3.0/0.6 (双排)
a-10	2.50mm	4.1mm	3-三排	3-三排	30	3-30"	C-PA6T	R=90°	12.0mm间距22	2-3.0/0.3 (双排)
a-10	2.50mm	4.4mm	4-四排	4-四排	40	4-40"	D-PA6T	R=90°	100=非焊接端子	3-2.8/0.4 (双排)
a-10	2.50mm	4.5mm							100=非焊接端子	4-2.6/0.3 (双排)
a-10	2.50mm	4.7mm							100=非焊接端子	其它另做说明
a-10	2.50mm	4.9mm							100=非焊接端子	
a-10	2.50mm	5.0mm							100=非焊接端子	
a-10	2.50mm	5.1mm							100=非焊接端子	
a-10	2.50mm	5.2mm							100=非焊接端子	
a-10	2.50mm	5.3mm							100=非焊接端子	
a-10	2.50mm	5.4mm							100=非焊接端子	
a-10	2.50mm	5.5mm							100=非焊接端子	
a-10	2.50mm	5.6mm							100=非焊接端子	
a-10	2.50mm	5.7mm							100=非焊接端子	
a-10	2.50mm	5.8mm							100=非焊接端子	
a-10	2.50mm	5.9mm							100=非焊接端子	
a-10	2.50mm	6.0mm							100=非焊接端子	

上海狮拓电子科技有限公司

TOLERANCE:	2x38	±0.00	48.40
X	±XXX	2x39	±0.00
XX	±0.20	49.00	±0.10
ANG.		50.00	±0.10

THIRD ANGLE PROJECTION

产品名:  
产品料号:

姓名: \_\_\_\_\_ 日期: \_\_\_\_\_  
 审核: \_\_\_\_\_ 日期: \_\_\_\_\_  
 日期: \_\_\_\_\_

客户确认  
 日期: \_\_\_\_\_ 日期: \_\_\_\_\_  
 日期: \_\_\_\_\_

1.00mm双排母, SMT, 塑高2.1mm 可带内柱  
 Spec: 1.00mm Female Header, Dual Row, SMT with  
 Locating Peg  
 Positions: 2X2.2X50  
 Plastics Height: 2.1mm