


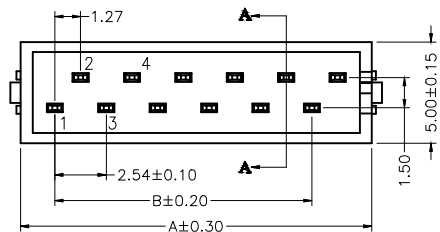
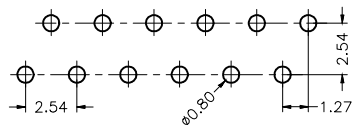


R O H S

ST0-C0-017



SECTION A-A

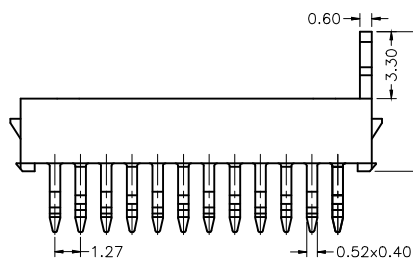

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


■ Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ

■ Wafer(针座)

- Part No. (料号) : 1127WV XX RE 9T SN BO
- Poles (PIN数) : 04-26P
- Material (材质) : PA9T UL 94V-0

Pin针: Bronze (青铜)
Finish (电镀) : Tin-Plated (镀锡)

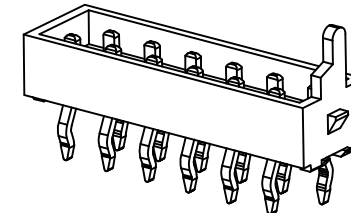

1127 W V XX RE 9T SN- X



①系列

②类别: W - W A F E R 类

③外观形态:

V - 180°

R - 90° (带脚式)

④PIN数:

单排- X X

双排- 2 * X X

⑤颜色:

空码-本色

B K - 黑色

B R - 棕色

R E - 红色

O R - 橙色

Y E - 黄色

G R - 绿色

B L - 蓝色

P R - 紫色

G Y - 灰色

W H - 白色

B E - 米黄色

B N - 咖啡色

L B - 浅蓝色

R D - 暗红色

T S - 其它

⑥材质:

6 T - PA 6 T

9 T - PA 9 T

4 6 - PA 4 6

L P - L C P

T S - 其它

⑦电镀类别:

G * * - 镀金

V * * - 镀全金

S - 镀银

* 0 1 - 1 U "

* 0 2 - 2 U "

* 0 3 - 3 U "

* 0 5 - 5 U "

* 1 0 - 1 0 U "

* 1 5 - 1 5 U "

* 3 0 - 3 0 U "

* 5 0 - 5 0 U "

N - 镀镍 (3 0 - 5 0 U ")

S N - 镀亮锡 (7 0 - 1 2 0 U ")

S N 1 - 镀亮锡 (1 2 0 U " M i n .)

S W - 镀雾锡

H S - 高温锡

⑧空PIN位置及特殊码:

BO-无槽

Circuit	Dimension		Q'ty /Tube
	A	B	
04	7.20	2.54	71
06	9.74	5.08	54
08	12.28	7.62	44
10	14.82	10.16	37
12	17.63	12.70	31
14	19.90	15.24	28
16	22.44	17.78	25
18	24.98	20.32	22
20	27.52	22.86	20
22	30.06	25.40	18
24	32.60	27.94	17
26	35.14	30.48	16

TOLERANCE:

X ±XXX

X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECT

签名

日期

审核

日期

客户确认

承认 日期

撤回 日期

1127 WV XX RE9T SN BO