
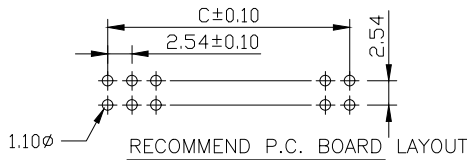
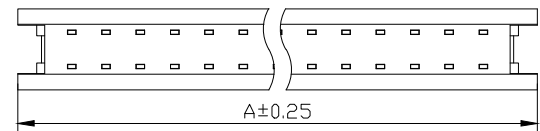

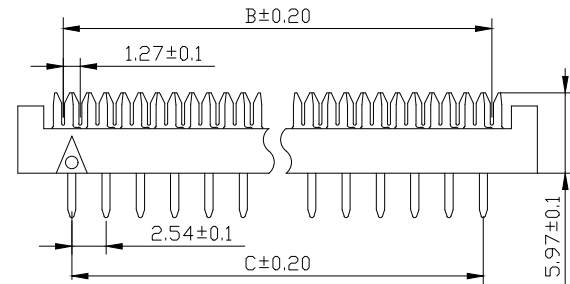




R O H S

页码	文件编号
1 OF 1	ST0-CO-065

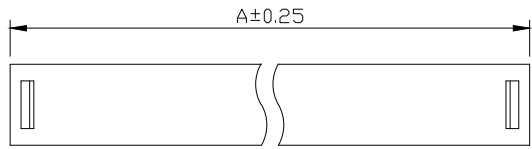

■ Specifications(规格) :

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ DI P

- Part No. (料号) : 5254DXXBKPTH01
- Poles (PIN数) :06-64P
- Material (材质) :PBT + Glass Fiber (UL94V-0)
Pin针: Bronze (青铜)
Finish (电镀) :Contact-Plated (接触点镀金)
Bottom-Nickel (底部镀镍)

5254 D XX BK PT H01 X

- ①系列
- ②类别: D-DI P类
- ③PIN数:
X P位
- ④颜色:
BK - 黑色 GY - 灰色
- ⑤材质:
6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6 L P
- T S - 其它

- ⑥电镀类别: G * * - 镀金 V * *H* 镀全镀半金
- * 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
- * 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
- N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0
- S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银
- S W - 镀雾锡 H S - 高温锡

⑦空PIN位置及特殊码:

Circuit	Dimension		
	A	B	C
6	13.07	6.35	5.08
8	15.61	8.89	7.62
10	18.15	11.43	10.16
12	20.69	13.97	12.70
14	23.23	16.51	15.24
16	25.77	19.05	17.78
18*	28.31	21.59	20.32
20*	30.85	24.13	22.86
24	35.83	29.21	27.94
26	38.47	31.75	30.48
30	43.55	36.83	35.56
34	48.63	41.91	40.64
36	51.17	44.45	43.18
40	56.25	49.53	48.26
50	68.95	62.23	60.96
60	81.65	74.93	73.66
64	86.73	80.01	78.74

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	???:



上海狮拓电子科技有限公司

签名 _____
日期 _____
审核 _____
日期 _____

客户确认

承认 _____ 日期 _____
 取回 _____ 日期 _____

5254DXXBKPTH01

XXP 2.54mm FD 二件式半金1U

THIRD ANGLE PROJECT