


A-A SECTION

B-B SECTION

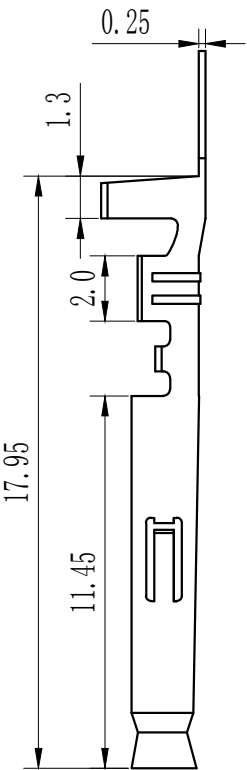

技术参数 SPECIFICATIONS

- ◆间距: 4.5 Pitch:4.5
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 5A, AC, DC
Current rating:5A, AC, DC
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆端子: 磷青铜
Terminal:Phosphor Bronze

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

	上海狮拓电子科技有限公司	
	产品名称: 产品料号:	THIRD ANGLE PROJECTION

签名 _____	客户确认 <input type="checkbox"/> 承认 _____ 日期 _____ <input type="checkbox"/> 驳回 _____ 日期 _____
日期 _____	
审核 _____	
日期 _____	

EL-Y-T