


技术参数 SPECIFICATIONS


- ◆间距: 4.5 Pitch:4.5
- ◆适用线规: AWG#26-#16  
Applicable Wire:AWG#26-#16
- ◆额定电压: AC,DC, 300V (有效值)  
Voltage rating: AC,DC, 300V(rms)
- ◆额定电流: 6.0-10.0A, AC, DC  
Current rating:6.0-10.0A, AC, DC
- ◆耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻:  $\geq 1500\Omega$   
Insulation resistance: $\geq 1500\Omega$
- ◆接触电阻:  $\leq 15m\Omega$   
Contact resistance: $\leq 15m\Omega$

材料 MATERIAL


- ◆绝缘体: 尼龙66, UL94V-0  
Insulator:Nylon66 UL94V-0

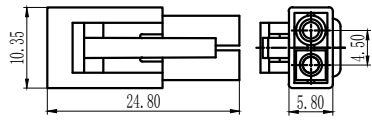


6613M-02

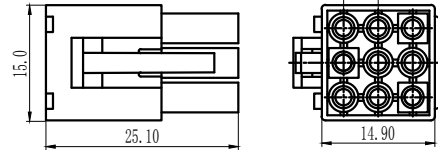


6613M-3×03

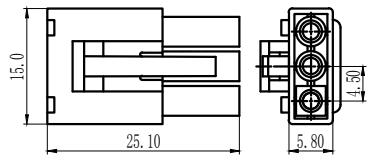


6613M-03

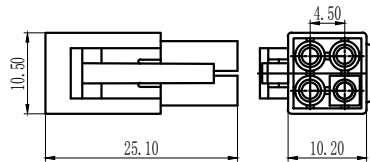


6613M-2×02

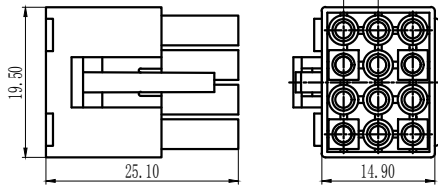


6613M-3×04

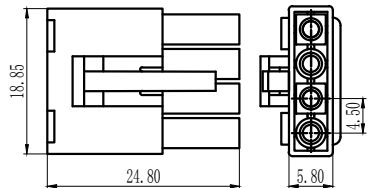

6613M-04

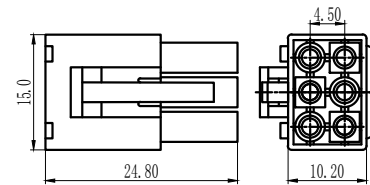

6613M-2×03

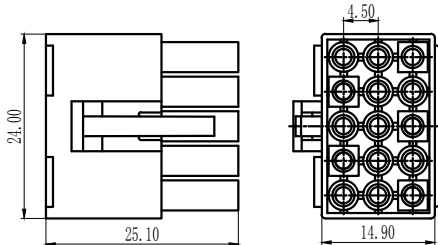

6613M-3×05

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_

日期 \_\_\_\_\_

审核 \_\_\_\_\_

日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

EL-NY